

Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) EP 1 063 349 A2

(12) EUROPEAN PATENT APPLICATION

(43) Date of publication:  
27.12.2000 Bulletin 2000/52

(51) Int. Cl.<sup>7</sup>: D21F 7/08

(21) Application number: 00301853.8

(22) Date of filing: 07.03.2000

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE  
Designated Extension States:  
AL LT LV MK RO SI

(72) Inventor: Paquin, Maurice R.  
Westboro, Massachusetts 01581 (US)


(74) Representative:  
Lowther, Deborah Jane et al  
Abel & Imray,  
20 Red Lion Street  
London WC1R 4PQ (GB)

(30) Priority: 22.06.1999 US 337749

(71) Applicant:  
ALBANY INTERNATIONAL CORP.  
Albany, New York 12204 (US)

(54) Method of manufacturing a laminated papermaking fabric

(57) A papermaking press fabric is manufactured by attaching a strip (40) of top laminate layer material to a base fabric (20) using a heat-activated adhesive film (42) which is bonded to one side of the material so as to form a multi-component strip (30). The top laminate layer material may be a woven fabric, nonwoven mesh, or thermoplastic sheet material. The strip (30) is spiralled onto the outer surface (22) of the base fabric (20) with the heat-activated adhesive film (42) against the outer surface (22) and bonded thereto with heat and pressure. The portions of the multi-component strip (30) overhanging the lateral edges (24, 26) of the base fabric (20) are then trimmed, and a staple fiber batt is needled into and through the top laminate layer to attach it firmly to the base fabric (20).

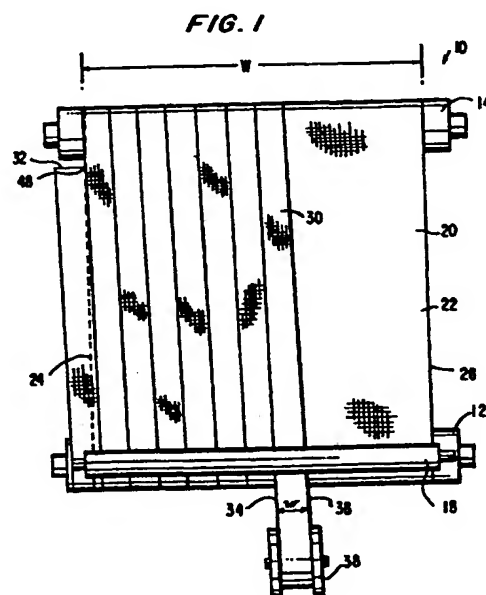

EP 1 063 349 A2

## Description

[0001] The present invention relates to the paper-making arts. More specifically, the present invention relates to a method for manufacturing a laminated papermaking fabric using a multicomponent strip of material comprising an activatable adhesive; in particular, the invention relates to a papermaker's press fabric wherein a top laminate layer is applied to a base fabric thereof in a spiral configuration and attached thereto with a heat-activated adhesive.

[0002] During the papermaking process, a fibrous web is formed by depositing a fibrous slurry, that is, an aqueous dispersion of cellulose fibers, on a moving forming fabric in the forming section of a paper machine. A large amount of water is drained from the slurry through the forming fabric during this process, leaving the fibrous web on the surface of the forming fabric.

[0003] The newly formed web proceeds from the forming section to a press section, which includes a series of press nips. The fibrous web passes through the press nips supported by a press fabric, or, as is often the case, between two press fabrics. In the press nips, the fibrous web is subjected to compressive forces which squeeze water therefrom, and which adhere the fibers in the web to one another to turn the fibrous web into a sheet. The water is accepted by the press fabric or fabrics and, ideally, does not return to the sheet.

[0004] The newly formed paper sheet finally proceeds to a dryer section, which includes at least one series of rotatable dryer drums or cylinders, which are internally heated by steam. The sheet is directed in a sinuous path sequentially around each in the series of drums by a dryer fabric, which holds the sheet closely against the surfaces of the drums. The heated drums reduce the water content of the sheet to a desirable level through evaporation, thereby completing the transformation of the fibrous web into a paper sheet.

[0005] It should be appreciated that the forming, press and dryer fabrics all take the form of endless loops on the paper machine and function in the manner of conveyors. It should further be appreciated that paper manufacture is a continuous process which proceeds at considerable speed. That is to say, the fibrous slurry is continuously deposited onto the forming fabric in the forming section, while a newly manufactured paper sheet is continuously wound onto rolls after it exits from the dryer section.

[0006] The press fabrics used in the press section are crucial components in the paper manufacturing process. One of their functions, as implied above, is to support and to carry the paper product being manufactured through the press nips.

[0007] The press fabrics also take part in the finishing of the surface of the paper sheet. That is, the press fabrics are designed to have smooth surfaces and uniformly resilient structures, so that, in the course of pass-

ing through the press nips, a smooth, mark-free surface is imparted to the paper.

[0008] Perhaps most importantly, the press fabrics accept the large quantities of water extracted from the wet paper in the press nip. In order to fill this particular function, there literally must be space (void volume) within the fabric for the water to go, and the fabric must have adequate permeability to water for its entire useful life. Finally, the press fabrics must be able to retain the water accepted from the wet paper upon exit from the press nip, so that the water will not rewet the paper.

[0009] Contemporary press fabrics are produced in a wide variety of styles designed to meet the requirements of the paper machines on which they are installed for the paper grades being manufactured. Generally, they comprise a woven base fabric into which has been needled a batt of fine, nonwoven fibrous material. The base fabrics may be woven from monofilament, plied monofilament, multifilament or plied multifilament yarns, and may be single-layered, multi-layered or laminated. The yarns are typically extruded from any one of the synthetic polymeric resins, such as polyamide and polyester resins, used for this purpose by those of ordinary skill in the paper machine clothing arts.

[0010] The woven base fabrics themselves take many different forms. For example, they may be woven endless, or flat woven and rendered into endless form with a woven seam. Alternatively, they may be produced by a process commonly known as modified endless weaving, wherein the widthwise edges of the base fabric are provided with seaming loops using the machine-direction (MD) yarns thereof. In this process, the MD yarns weave continuously back-and-forth between the widthwise edges of the fabric, at each edge turning back and forming a seaming loop. A base fabric produced in this fashion is placed into endless form during installation on a paper machine, and for this reason is referred to as an on-machine-seamable fabric. To place such a fabric into endless form, the two widthwise edges are brought together, the seaming loops at the two edges are interdigitated with one another, and a seaming pin or pintle is directed through the passage formed by the interdigitated seaming loops.

[0011] Further, the woven base fabrics may be laminated by placing one base fabric within the endless loop of another, and by needling a staple fiber batt through both base fabrics to join them to one another. One or both woven base fabrics may be of the on-machine-seamable type.

[0012] Moreover, a woven base fabric may be produced by spirally winding a woven fabric strip in accordance with the teachings of commonly assigned U.S. Patent No. 5,360,656 to Rexfelt et al., the teachings of which are incorporated herein by reference.

[0013] Laminated base fabrics may also be produced by applying a top laminate layer to a woven base fabric of any of the above-noted types using the spiral manufacturing technique disclosed in U.S. Patent No.

5,360,656. The top laminate layer may be a spirally wound flat-woven fabric strip; a strip of thermoplastic sheet material, such as, of polyurethane; or a strip of nonwoven mesh, such as that disclosed in commonly assigned U.S. Patent No. 4,427,734 to Johnson, the teachings of which are also incorporated herein by reference. In each case, the width of the strip is much less than that of the woven base fabric, and several spiral turns thereof are required to completely cover the base fabric. Such top laminate strips have traditionally been prejoined to each other in a length and width required for a full-size press fabric. This full-width top laminate layer is then attached to the base fabric by needling a staple fiber batt into and through both layers to form a laminated base fabric. Ultimately, the batt is the main means for locking the top laminate layer to the base fabric.

[0014] The present invention is an improvement in the attachment of a top laminate layer to a base fabric, wherein the top laminate layer comprises at least one multi-component strip of material spiralled onto the base fabric, one of the components being a heat-activated adhesive.

[0015] The present invention provides a method of manufacturing a papermaking fabric, wherein a multi-component strip of material comprising an activatable adhesive is spiralled around an endless base fabric and attached thereto by activating the adhesive so as to form an overlying laminate layer.

[0016] The present invention further provides a method for manufacturing a press fabric for a paper machine, said method comprising:

providing a base fabric for said press fabric, said base fabric being in the form of an endless loop, said endless loop having an inner surface, an outer surface, a first and a second lateral edge, and a fabric width measured transversely between said lateral edges;

providing a multi-component strip for covering said outer surface of said base fabric in a closed helix, said strip having a beginning, a first lateral edge and a second lateral edge, a strip width measured transversely thereacross, said strip width being less than said fabric width, said strip having at least a strip of top laminate layer material and a heat-activated adhesive film bonded to one side of said strip of top laminate layer material;

attaching said side of said strip of top laminate layer material having said heat-activated adhesive film at said beginning of said multi-component strip to said outer surface of said base fabric at a point on said first lateral edge of said base fabric using heat and pressure;

continuing from said beginning of said multi-component strip, attaching said side of said strip of top laminate layer material having said heat-activated adhesive film to said outer surface of said base fab-

ric in a closed helix having a plurality of turns using heat and pressure, wherein said first lateral edge of a turn of said multi-component strip being attached to said outer surface abuts against said second lateral edge of a turn of said multi-component strip previously attached to said outer surface, until said outer surface of said base fabric is completely covered by said multi-component strip in a closed helix; and

cutting said multi-component strip at a point on said second lateral edge of said base fabric, whereby said multi-component strip forms a top laminate layer on said base fabric.

[0017] The present invention additionally provides a laminated papermaking fabric obtainable by the above-mentioned methods. The laminated papermaking fabric comprises an endless base fabric and an overlying laminate layer comprising a strip of material spirally wound around the endless base fabric, an activated adhesive originating from the strip of material being disposed between the strip and the endless base fabric. The papermaking fabric may include a fibrous layer subsequently needled into and through the strip to attach it firmly to the base fabric.

[0018] There is also provided the use of a multi-component strip of material comprising an activatable adhesive to form a laminated papermaking fabric in which the strip is spiralled around an endless base fabric as an overlying layer.

[0019] In particular, the present invention provides a method for manufacturing a press fabric for a paper machine wherein a top laminate layer is attached to a base fabric in a spiral manufacturing process using a heat-activated adhesive film.

[0020] More specifically, the present invention comprises the step of providing a base fabric for the press fabric. The base fabric may be of any of the standard varieties heretofore described, and is in the form of an endless loop having an inner surface, an outer surface, a first and second lateral edge, and a fabric width measured transversely between the lateral edges.

[0021] A multi-component strip for covering the outer surface of the base fabric in a closed helix is also provided. The multi-component strip has a beginning, a first lateral edge, a second lateral edge, and a strip width measured thereacross. The strip width is generally much less than the fabric width. The multi-component strip comprises at least a strip of top laminate layer material and a heat-activated adhesive film bonded to one side of the strip of top laminate layer material. The strip of top laminate layer material may be, for example, a woven fabric, a nonwoven mesh, or a sheet of thermoplastic material, such as of polyurethane.

[0022] The heat-activated adhesive film is used to attach the strip of top laminate layer material to the base fabric. To start the attachment process, the beginning of the multi-component strip is attached to the outer sur-

face of the base fabric at a point on the first lateral edge thereof using heat and pressure. The side of the strip of top laminate layer material having the heat-activated adhesive film faces the base fabric during this process. The multi-component strip is oriented at a slight angle with respect to the first lateral edge, so that it may be spiralled onto the base fabric to completely cover it in a closed helix.

**[0023]** Continuing from the beginning of the multi-component strip, the side of the strip of top laminate layer material having the heat-activated adhesive film is attached to the outer surface of the base fabric in a closed helix having a plurality of turns using heat and pressure, wherein the first lateral edge of the turn of the multi-component strip being attached abuts against the second lateral edge of the turn of the multi-component strip previously attached to the outer surface, until the outer surface of the base fabric is completely covered by the strip in a closed helix. The multi-component strip is then cut at a point on the second lateral edge of the base fabric.

**[0024]** Preferred methods and apparatus for performing the present invention will now be described, by way of example only, in more complete detail with reference to the drawings identified hereinbelow:

Figure 1 is a plan view of one preferred form of apparatus that may be used to practice the present invention so as to manufacture a press fabric for a paper machine;

Figure 2 is a side view of the nip formed by the heated roll and the pressure roll of the apparatus shown in Figure 1;

Figure 3A is a schematic cross-sectional view of one multi-component strip that may be used in the practice of the present invention;

Figures 3B and 3C are schematic cross-sectional views of two alternative multi-component strips;

Figure 4 is a plan view of a portion of an alternative apparatus that may be used to practice the present invention, which apparatus incorporates a traversing module; and

Figure 5 is a side view of the portion of the alternative apparatus shown in Figure 4.

**[0025]** Turning now to the figures, Figure 1 is a plan view of an apparatus 10 which may be used to practice the present invention. Apparatus 10 includes a first process roll 12 and a second process roll 14, each of which is rotatable about its longitudinal axis. The first process roll 12 and the second process roll 14 are parallel to one another, and may be moved and set at any number of fixed distances from one another. The first process roll 12 may be a heated roll. The apparatus 10 may be a dryer or heat-setting device with a heated roll, or may be part of a needle loom.

**[0026]** The manufacturing process is begun by mounting a base fabric 20 for a press fabric around the

first and second process rolls 12, 14. The base fabric 20 is in the form of an endless loop having an inner surface, which is not visible in the figure, an outer surface 22, a first lateral edge 24 and a second lateral edge 26. The width, W, of the base fabric 20 is measured transversely thereacross between the first and second lateral edges 24, 26. It will be observed that the first and second process rolls 12, 14 are within the endless loop formed by the base fabric 20. Once the base fabric 20 is so mounted, the first and second process rolls 12, 14 are moved apart from one another, and set at fixed positions such that the base fabric 20 may be placed under tension.

**[0027]** It should be understood that prior to being mounted about first and second process rolls 12, 14, the base fabric 20 may be turned inside out to place the surface intended to be on the inside when the press fabric being manufactured is on the paper machine on the outside for the process of the present invention. In this regard, the terms "inner surface" and "outer surface" denote the surfaces of the base fabric 20 when it is disposed about first and second process rolls 12, 14, and not necessarily those when the base fabric 20 is on a paper machine.

**[0028]** A pressure roll 16 is also included in apparatus 10 adjacent to and forming a nip 18 with first process roll 12. Nip 18 is more readily seen in Figure 2, which is a side view of the first process roll 12 and pressure roll 16. The latter is so positioned that it presses base fabric 20 against the first process roll 12, which, it will be recalled, may be a heated roll.

**[0029]** A multi-component strip 30 is provided for covering the outer surface 22 of the base fabric 20 in a closed helix. The multi-component strip 30 has a beginning 32, a first lateral edge 34 and a second lateral edge 36. The width, w, of the multi-component strip 30 is measured transversely thereacross between the first and second lateral edges 34, 36, and is less than the width, W, of the base fabric 20.

**[0030]** As shown in Figure 3A, a schematic cross-sectional view of a multi-component strip used in the practice of the present invention, the multi-component strip 30 comprises a strip 40 of top laminate layer material and a heat-activated adhesive film 42 bonded to one side of the strip 40 of top laminate layer material. That is to say, multi-component strip 30 comprises a strip of woven fabric 44 bonded to a heat-activated adhesive film 42. Figures 3B and 3C are cross-sectional views of two alternative embodiments of the multi-component strip. In Figure 3B, multi-component strip 50 comprises a strip of nonwoven mesh 52 bonded to heat-activated adhesive film 42, and, in Figure 3C, multi-component strip 60 comprises a strip of thermoplastic sheet material 62, such as of polyurethane, bonded to a heat-activated adhesive film 42. Nonwoven mesh 52 may be obtained from Naltex. The strip of thermoplastic sheet material 62 and the heat-activated adhesive film 42 are preferably apertured to facilitate the passage of water

therethrough. The aperturing may be carried out during the needling of a staple fiber batt into and through the multi-component strips 30,50,60, once they have been attached to the base fabric 20. Alternatively, the aperturing may be carried out prior to attaching multi-component strips 30,50,60 to the base fabric 20. In such case, the individual apertures 46,64 may be of any geometric shape, such as circular, elliptical, square, rectangular, diamond-shaped and so forth, and may be arranged through the heat-activated adhesive film 42 or the multi-component strip 60 in any pattern suitable for the performance of the press fabric. Where the heat-activated adhesive film 42 is attached to a porous layer, such as the woven fabric 44 shown in Figure 3A or the nonwoven mesh 52 shown in Figure 3B, the heat-activated adhesive film 42 may be so apertured prior to its attachment thereto. On the other hand, where the heat-activated adhesive film 42 is attached to a strip of thermoplastic sheet material 62, as is shown in Figure 3C, they may be apertured after they are attached to one another and before they are attached to the base fabric 20. The heat-activated adhesive film 42 and the strip of thermoplastic sheet material 62 may be formed in one step by coextrusion, and the coextruded multi-component strip 60 apertured prior to its attachment to base fabric 20.

**[0031]** Referring back to Figures 1 and 2, multi-component strip 30, as well as multi-component strips 50,60 may be dispensed from a supply roll 38. The beginning 32 of the multi-component strip 30 is attached to a point 48 on the first lateral edge 24 of the standard base fabric 20. More precisely, the second lateral edge 36 at the beginning 32 of the multi-component strip 30 is attached to point 48 with the heat-activated adhesive film 42 in contact with the outer surface 22 of the base fabric 20. Heat and pressure, provided by first process roll 12 and pressure roll 16 at nip 18, respectively, may be used to bring about the attachment.

**[0032]** The first process roll 12 and the second process roll 14 are rotated in a common direction during the manufacturing process while the multi-component strip 30 is fed from supply roll 38 to completely cover the outer surface 22 of the base fabric 20 in a closed helix. Heat and pressure, provided by first process roll 12 and pressure roll 16 at nip 18, respectively, attach the multi-component strip 30 to the outer surface 22. The first lateral edge 34 of each turn of the multi-component strip 30 being attached abuts against the second lateral edge 36 of the turn of the strip 30 previously attached to the outer surface 22, until the outer surface 22 of the standard base fabric 20 is completely covered by the strip 30 in a closed helix.

**[0033]** As an alternative to, or in addition to, the use of a heated first process roll 12, hot air may be directed into nip 18 between base fabric 20 and multi-component strip 30 to soften the heat-activated adhesive film 42 prior to its passage through nip 18. An infrared heater directed at the multi-component strip 30 at a point

before it enters nip 18 could be used to accomplish the same result. Alternatively, pressure roll 16 may be a heated roll.

**[0034]** As a further alternative, the heat source, such as hot air or an infrared heater, may be included in a module which traverses along first process roll 12 with supply roll 38 as the multi-component strip 30 is being dispensed therefrom, rather than heating continuously across the full width of the base fabric 20 for the entire laminating process. Such a traversing module could include a pressure roll for use instead of the full-width pressure roll 16.

**[0035]** More specifically, Figure 4 is a plan view of an alternative embodiment of the apparatus 10. Instead of full-width pressure roll 16, a traversing module 70, which includes supply roll 38, has a pressure roll 72 of a width somewhat greater than that of the multi-component strip 30. A heat source 74, such as a source of hot air or infrared radiation, is also carried on traversing module 70 and heats multi-component strip 30 before it enters nip 18. Figure 5 is a side view of the apparatus 10 as shown in Figure 4 and shows the traversing module 70 and its components more clearly.

**[0036]** When the entire outer surface 22 of the base fabric 20 is completely covered by the multi-component strip 30, the strip 30 is cut at a point on the second lateral edge 26 of the base fabric 20. Because the multi-component strip 30 is spiralled onto the outer surface 22 of the base fabric 20, portions thereof will extend laterally beyond the first and second lateral edges 24, 26 of the base fabric 20. These portions may be trimmed along the first and second lateral edges 24, 26 at the conclusion of the manufacturing process.

**[0037]** Finally, a staple fiber batt may be needled into and through the top laminate layer formed by the multi-component strip 30 to firmly and permanently attach it to the base fabric 20. The staple fiber batt at this point becomes the main means connecting the top laminate layer to the base fabric 20. A staple fiber batt may also be attached to the other side (the inner surface) of the base fabric 20.

**[0038]** After staple fiber batt has been needled into one or both sides of the base fabric 20, the press fabric so obtained, comprising base fabric 20, top laminate layer formed by multi-component strip 30 and staple fiber batt, may again be exposed to heat, which would reactivate the heat-activated adhesive film 42 and improve the bonding of the base fabric 20, top laminate layer formed by multi-component strip 30 and the staple fiber batt together.

**[0039]** Finally, the press fabric so manufactured may be turned inside out upon its removal from the first and second process rolls 12,14 to place the surface having the top laminate layer formed by the multi-component strip 30 attached thereto on the inside of the press fabric for use on a paper machine.

**[0040]** Modifications to the above would be obvious to those of ordinary skill in the art, but would not bring

the invention so modified beyond the scope of the appended claims.

[0041] The present invention eliminates the problem of matching the length of the top laminate layer to that of the base fabric. Because the top laminate layer is spiralled onto the base fabric, its length will appropriately match that of the base fabric. Moreover, the manufacture of laminated press fabrics in accordance with the present invention greatly facilitates manufacture, as the strip of top laminate layer material can be made in quantity in advance of its actual need. Further, the use of a heat-activated adhesive film permits the use of top laminate layer materials that would be otherwise difficult to use. Finally, the heat-activated adhesive film keeps the top laminate layer in its proper position, and prevents it from migrating during needling.

#### Claims

1. A method of manufacturing a papermaking fabric, wherein a multi-component strip of material comprising an activatable adhesive is spiralled around an endless base fabric and attached thereto by activating the adhesive so as to form an overlying laminate layer.
2. A method for manufacturing a press fabric for a paper machine, said method comprising:
  - providing a base fabric for said press fabric, said base fabric being in the form of an endless loop, said endless loop having an inner surface, an outer surface, a first and a second lateral edge, and a fabric width measured transversely between said lateral edges;
  - providing a multi-component strip for covering said outer surface of said base fabric in a closed helix, said strip having a beginning, a first lateral edge and a second lateral edge, a strip width measured transversely thereacross, said strip width being less than said fabric width, said strip having at least a strip of top laminate layer material and a heat-activated adhesive film bonded to one side of said strip of top laminate layer material;
  - attaching said side of said strip of top laminate layer material having said heat-activated adhesive film at said beginning of said multi-component strip to said outer surface of said base fabric at a point on said first lateral edge of said base fabric using heat and pressure;
  - continuing from said beginning of said multi-component strip, attaching said side of said strip of top laminate layer material having said heat-activated adhesive film to said outer surface of said base fabric in a closed helix having a plurality of turns using heat and pressure, wherein said first lateral edge of a turn of said
- multi-component strip being attached to said outer surface abuts against said second lateral edge of a turn of said multi-component strip previously attached to said outer surface, until said outer surface of said base fabric is completely covered by said multi-component strip in a closed helix; and
- cutting said multi-component strip at a point on said second lateral edge of said base fabric, whereby said multi-component strip forms a top laminate layer on said base fabric.
3. A method as claimed in claim 1 or claim 2 wherein said strip of material is a woven fabric.
4. A method as claimed in claim 1 or claim 2 wherein said strip of material is a nonwoven mesh.
5. A method as claimed in claim 1 or claim 2 wherein said strip of material is a strip of thermoplastic sheet material.
6. A method as claimed in claim 5 wherein said thermoplastic sheet material is of polyurethane.
7. A method as claimed in claim 5 or claim 6 further comprising the step of aperturing said strip of thermoplastic sheet material.
8. A method as claimed in claim 2 wherein said heat-activated adhesive film is apertured.
9. A method as claimed in any one of claims 1 to 8 further comprising the step of needling a staple fiber batt into said laminate layer formed by said multi-component strip, after attaching said strip to said base fabric.
10. A method as claimed in claim 9 further comprising the step of heating said base fabric and said laminate layer formed by said multi-component strip after needling said staple fiber batt therethrough to reactivate said adhesive or said heat-activated adhesive film and to further connect said staple fiber batt, said top laminate layer and said base fabric together.
11. A method as claimed in any one of claims 1 to 8 further comprising the step, after said base fabric is covered by said multi-component strip to form said laminate layer, of trimming said multi-component strip along said first and second lateral edges of said base fabric.
12. A method as claimed in any one of claims 1 to 11 further comprising the steps of:
  - mounting said endless base fabric under ten-

sion around first and second process rolls for rotation therewith and arranging for a pressure roll to press said base fabric against said first process roll to form a nip;

feeding said multi-component strip into said nip at selected locations along said first process roll while rotating said first and second process rolls, so that said strip is spiralled around said endless base fabric and activating said activatable adhesive so that said multi-component strip is attached to the base fabric to form an overlying laminate layer.

13. A method as claimed in claim 12, wherein the activatable adhesive is activated by a heating step.

14. A method as claimed in any one of claims 1 to 11 further comprising the steps of:

providing a first and a second process roll, said first and second process rolls being rotatable about their respective axes and said axes being parallel to one another;  
mounting said base fabric around said first and second process rolls, said first and second process rolls thereby being within said endless loop of said base fabric;  
separating said first and second process rolls from one another to fixed positions, said base fabric thereby being placed under tension;  
providing a pressure roll, said pressure roll forming a nip with said first process roll and pressing said base fabric against said first process roll;  
rotating said first and second process rolls in a common direction;  
heating said multi-component strip to activate said heat-activated adhesive film;  
feeding said beginning of said multi-component strip into said nip at said first lateral edge of said base fabric, thereby attaching said top laminate layer at said beginning of said strip to said outer surface of said base fabric at a point on said first lateral edge thereof;  
continuing to rotate said first and second process rolls in a common direction while feeding said multi-component strip into said nip, thereby attaching said top laminate layer to said outer surface of said base fabric in a closed helix, until said outer surface of said base fabric is completely covered by said strip in a closed helix.

15. A method as claimed in any one of claims 12 to 14 further comprising the step of dispensing said multi-component strip from a supply roll.

16. A method as claimed in any one of claims 12 to 15

further comprising the step of turning said base fabric inside out before mounting said base fabric around said first and second process rolls.

17. A method as claimed in any one of claims 12 to 16 further comprising the step of removing said base fabric from said first and second process rolls after said outer surface thereof is covered by said multi-component strip.

18. A method as claimed in claim 17 further comprising the step of turning said base fabric inside out to place said laminated layer formed by said multi-component strip on the inside thereof.

19. A method as claimed in any one of claims 13 to 18 wherein said heating step is performed by using a heated first process roll.

20. A method as claimed in any one of claims 13 to 18 wherein said heating step is performed by using a heated pressure roll.

21. A method as claimed in any one of claims 13 to 18 wherein said heating step is performed by directing a flow of hot air into said nip between said multi-component strip and said base fabric.

22. A method as claimed in any one of claims 13 to 18 wherein said heating step is performed by using an infrared heater to heat said adhesive or said heat-activated adhesive film of said multi-component strip before said multi-component film enters said nip.


23. A method as claimed in any one of claims 12 to 22 wherein said pressure roll extends at least for said fabric width.

24. A method as claimed in any one of claims 12 to 22 wherein said pressure roll is shorter than said fabric width.

25. A laminated papermaking fabric obtainable by means of a method as claimed in any one of claims 1 to 24.


26. The use of a multi-component strip of material comprising an activatable adhesive to form a laminated papermaking fabric in which the strip is spiralled around an endless base fabric as an overlying layer.

FIG. 1

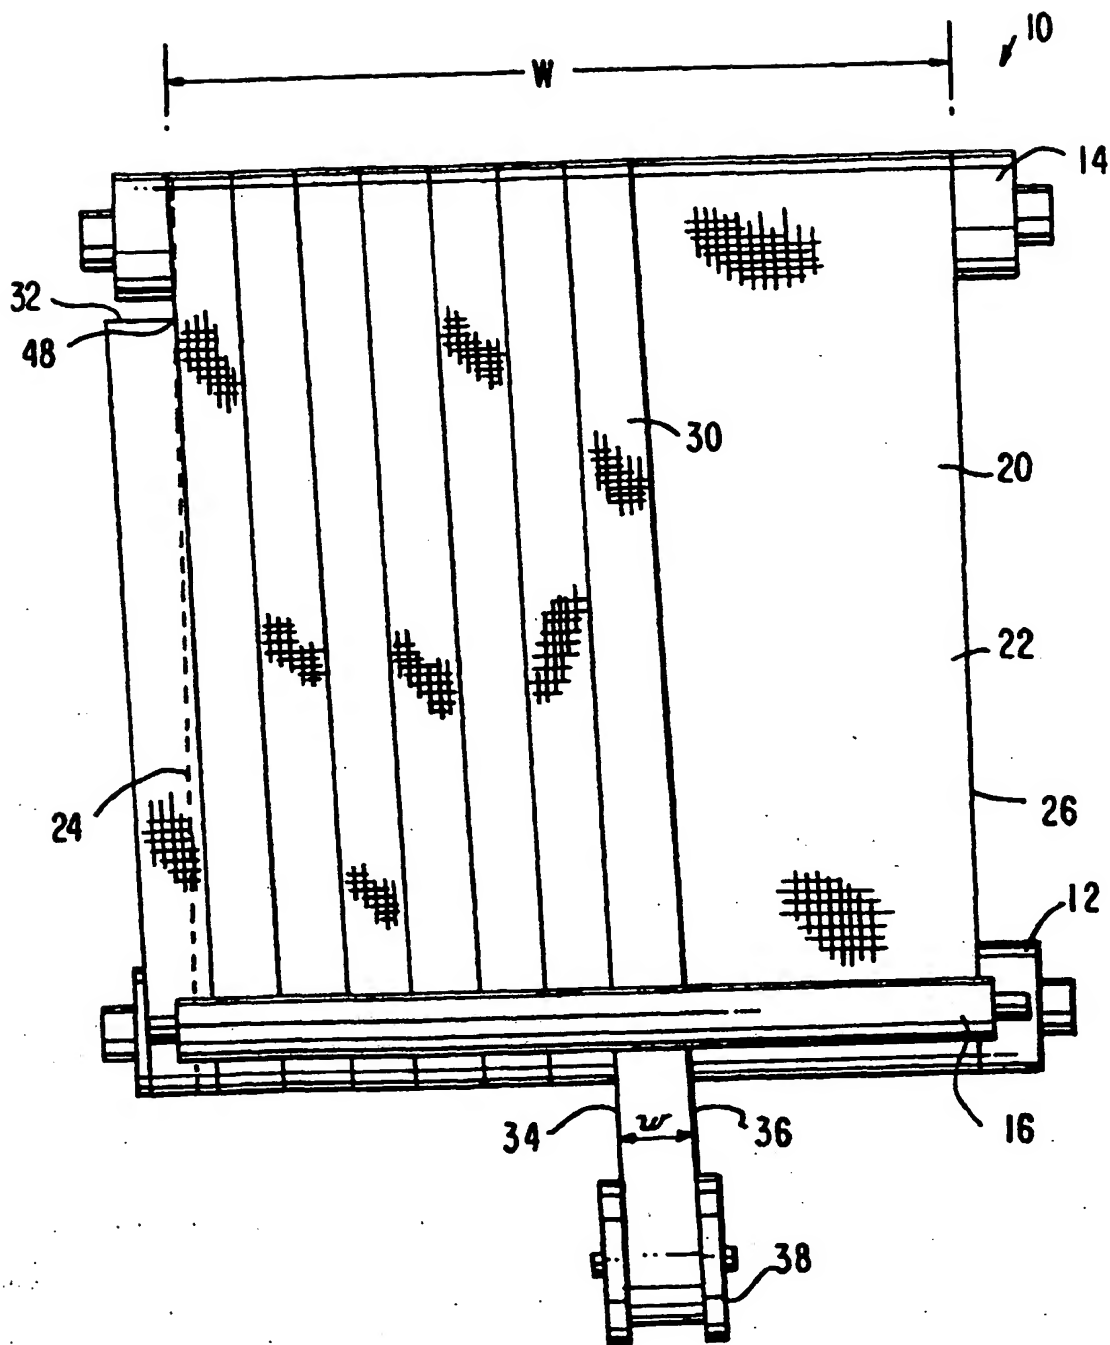





**FIG. 2**

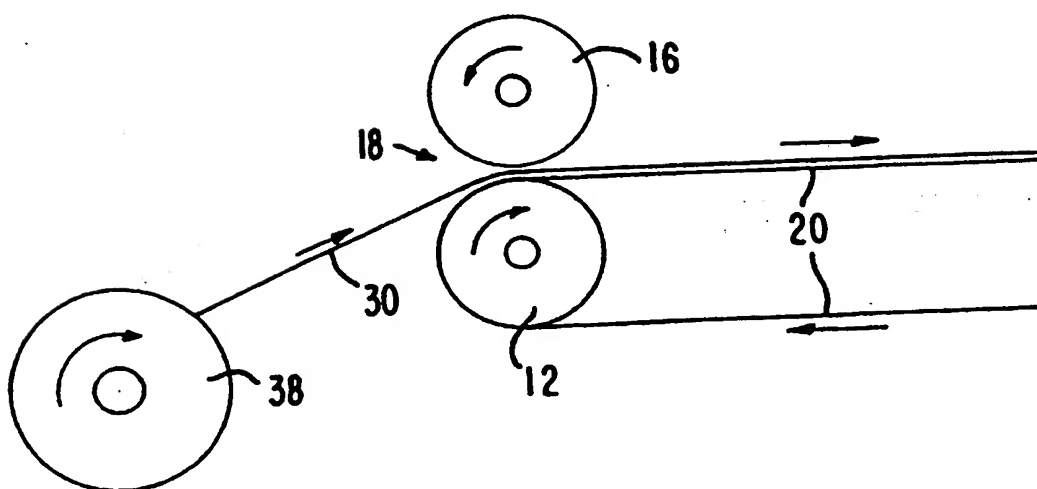


**FIG. 3A**


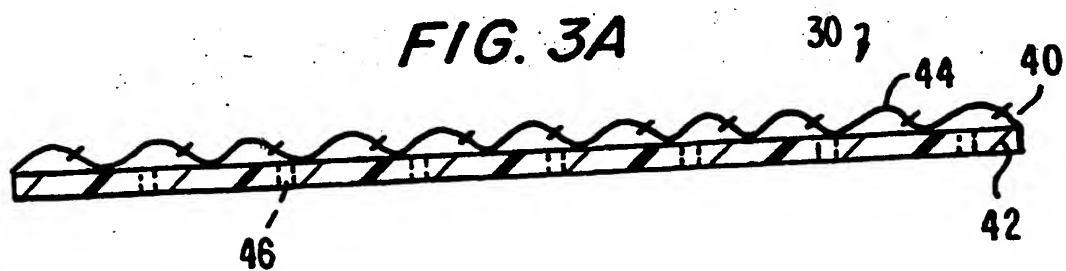


*FIG. 3B*

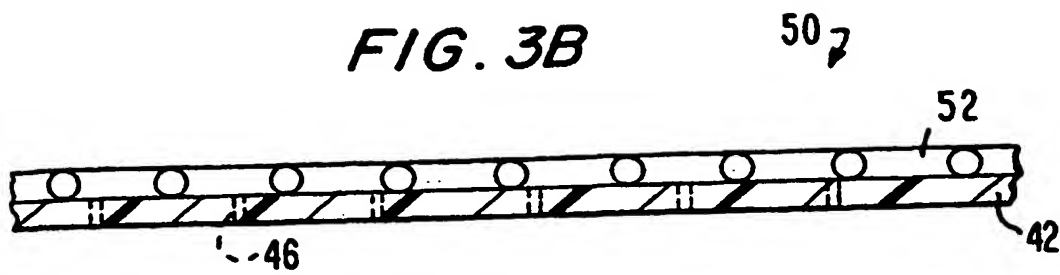

*FIG. 3C*

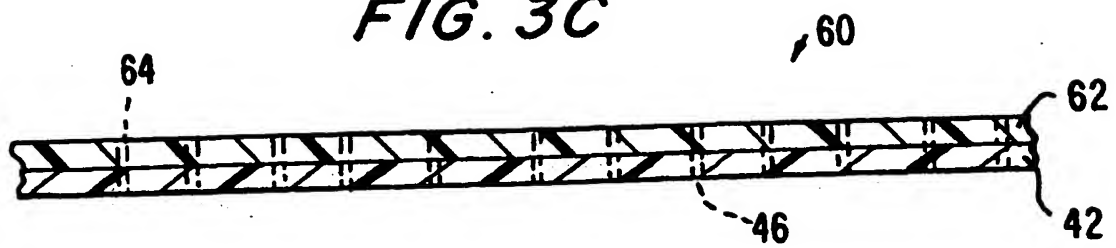

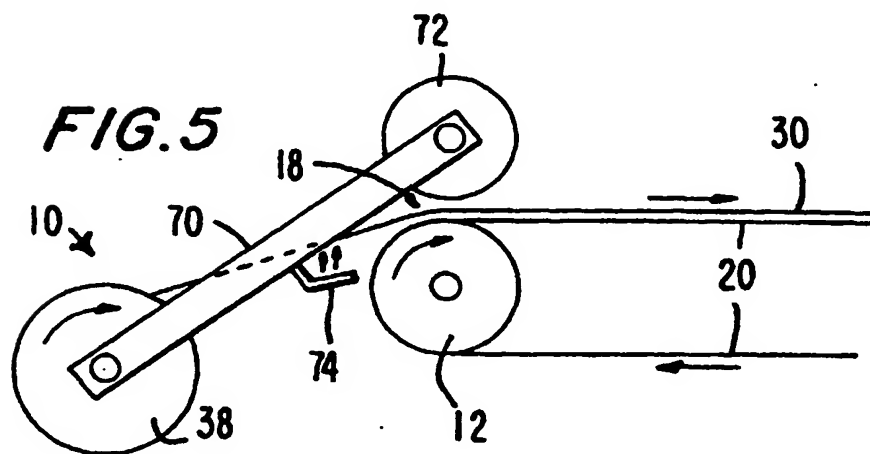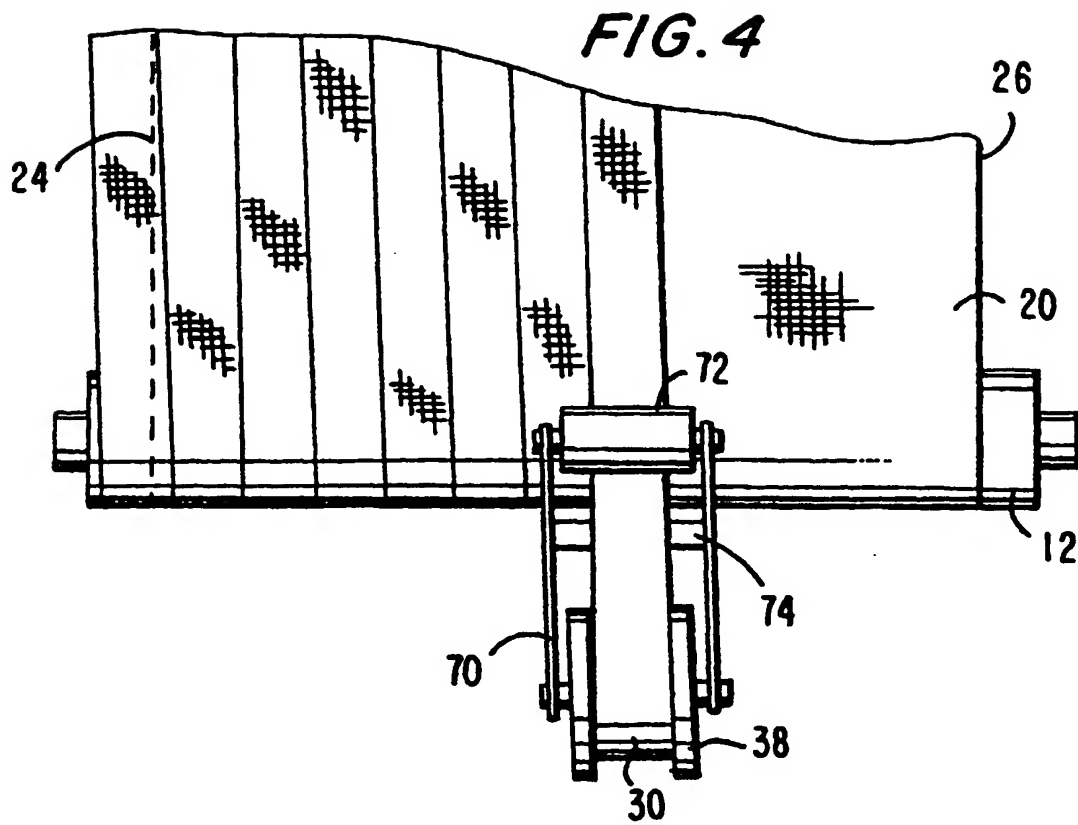

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 1 063 349 A3

(12)

## EUROPEAN PATENT APPLICATION

(88) Date of publication A3:

07.02.2001 Bulletin 2001/06

(43) Date of publication A2:

27.12.2000 Bulletin 2000/52

(21) Application number: 00301853.8

(22) Date of filing: 07.03.2000

(51) Int. Cl.<sup>7</sup>: D21F 7/08

(84) Designated Contracting States:

AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE

Designated Extension States:

AL LT LV MK RO SI

(30) Priority: 22.06.1999 US 337749

(71) Applicant:

ALBANY INTERNATIONAL CORP.  
Albany, New York 12204 (US)

(72) Inventor: Paquin, Maurice R.

Westboro, Massachusetts 01581 (US)


(74) Representative:

Lowther, Deborah Jane et al  
Abel & Imray,  
20 Red Lion Street  
London WC1R 4PQ (GB)

(54) Method of manufacturing a laminated papermaking fabric

(57) A papermaking press fabric is manufactured by attaching a strip (40) of top laminate layer material to a base fabric (20) using a heat-activated adhesive film (42) which is bonded to one side of the material so as to form a multi-component strip (30). The top laminate layer material may be a woven fabric, nonwoven mesh, or thermoplastic sheet material. The strip (30) is spiralled onto the outer surface (22) of the base fabric (20) with the heat-activated adhesive film (42) against the outer surface (22) and bonded thereto with heat and pressure. The portions of the multi-component strip (30) overhanging the lateral edges (24, 26) of the base fabric (20) are then trimmed, and a staple fiber batt is needled into and through the top laminate layer to attach it firmly to the base fabric (20).

FIG. 1

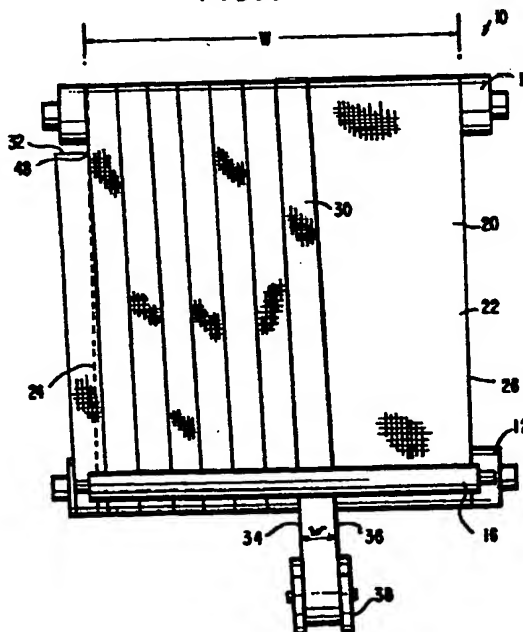

EP 1 063 349 A3

**EUROPEAN SEARCH REPORT**

Application Number  
EP 00 30 1853

| <b>DOCUMENTS CONSIDERED TO BE RELEVANT</b>  |   |   |   |
|---|---|---|---|
| <b>Category</b>   | <b>Citation of document with indication, where appropriate,<br/>of relevant passages</b>          | <b>Relevant<br/>to claim</b>  | <b>CLASSIFICATION OF THE<br/>APPLICATION (Int.Cl.7)</b> |
| A   | US 5 785 818 A (FEKETE ET AL)<br>28 July 1998 (1998-07-28)<br><br>* the whole document *<br>----- | 1-4, 9,<br>11, 12,<br>14, 15,<br>17, 25, 26   | D21F7/08  |
|   |   |   | TECHNICAL FIELDS<br>SEARCHED (Int.Cl.7)                 |
|   |   |   | D21F  |
| The present search report has been drawn up for all claims  |   |   |   |
| Place of search<br><b>THE HAGUE</b>   | Date of completion of the search<br><b>18 December 2000</b>                                       | Examiner<br><b>De Rijck, F</b>  |   |
| <b>CATEGORY OF CITED DOCUMENTS</b>  |   | T : theory or principle underlying the invention<br>E : earlier patent document, but published on, or after the filing date<br>O : document cited in the application<br>L : document cited for other reasons<br>.....<br>A : member of the same patent family, corresponding document |   |
| X : particularly relevant if taken alone<br>Y : particularly relevant if combined with another document of the same category<br>A : technological background<br>O : non-written disclosure<br>P : intermediate document |   |   |   |

# **ANNEX TO THE EUROPEAN SEARCH REPORT ON EUROPEAN PATENT APPLICATION NO.**

EP 00 30 1853

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

18-12-2000

| Patent document<br>cited in search report | Publication<br>date | Patent family<br>member(s) | Publication<br>date |
|---|---------------------|----------------------------|---------------------|
| US 5785818    A                           | 28-07-1998          | AU    712428 B             | 04-11-1999          |
|   |                     | AU    6085598 A            | 18-09-1998          |
|   |                     | BR    9807791 A            | 15-02-2000          |
|   |                     | CA    2230289 A            | 27-08-1998          |
|   |                     | WO    9838379 A            | 03-09-1998          |
|   |                     | CN    1248305 T            | 22-03-2000          |
|   |                     | EP    0861940 A            | 02-09-1998          |
|   |                     | JP 2000509772 T            | 02-08-2000          |
|   |                     | ZA    9801619 A            | 28-08-1998          |

EPO FORM P489

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ ~~FADED~~ TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**